


GFIAccuBLEND^{LV}

Dispenses exact colors automatically, in exact amounts, just steps away from your press.

Get color accuracy to ± 0.001 per pound (0.5 gr). Mix the exact amounts you need. Turn existing inventory into new spot colors. Manage jobs like never before. For water flexo, UV flexo or screen inks, AccuBlend-LV™ means incredibly easy-to-make spot colors, whenever you need them.

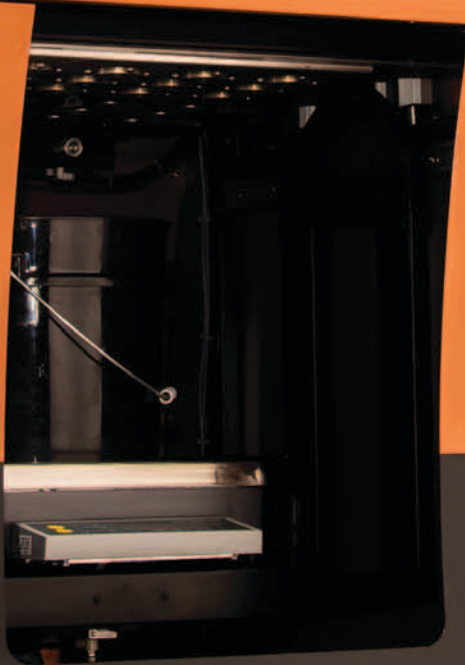

AccuBlend-LV™ for low viscous flexo inks

Its standard system integrates 12 base color reservoirs to meet a wide variety of ink needs for flexible packaging and other substrates. The system can be expanded to 24 colors by adding a second bank of integrated reservoirs, or by adding a traditional pump and rack system with drums and kits.

Its two-stage valves provide a high flow stage for speed, and a low flow stage for accuracy. Ink is fully re-circulated through both the valve and the material reservoir giving you assurance that the ink bases needed to make critical color will be thoroughly mixed.

AccuBlend-LV is all about options

With AccuBlend-LV you can have your system built to use drums, kits or the dispenser's exclusive integrated reservoirs as source containers.



AccuBLEND™ LV

Available Positions:	12 (expandable to 24)
Reservoir Size:	5.5 gallons (20.82 liter) or stand-alone drums / kits
Scale Capacity:	50 pounds (25 kg) or expandable to drum scale
Dosing Accuracy:	Up to (+/-) 0.001 lbs. (0.5 gr) per component
Valve type:	Two-stage
Recirculation:	Valve, lines and reservoir
Monitor:	22" (55.88 cm) Touch Screen
PC:	Windows Based
Dimensions:	35-3/4" (91 cm) W x 77-7/8" (197 cm) H x 73-1/2" (186 cm) D
Weight (empty):	1,045 lbs. (474 kg)
Power Requirements:	120VAC, 60 Hz, UL-NEMA 5-15, 2 pole
Air Requirements:	90-130-psi (6.2 - 9.0 bar)
Ink Types:	Flexo and Packaging



GFI Innovations 866-882-7216 GFIis.com
1840 Northwestern Avenue, Gurnee, IL (USA) 60031